


Glazing Lux System (Top Hang)




Glazing Lux System

- Draw even the highest panels with one hand
- No tacking, no uneasiness of panel movements thanks to single piece design of parking base
- Long years of comfortable usage even in the highest glazings thanks to its robustness with glass pins and strong profiles
- Especially suitable for inner and outer spaces like cafes, malls, offices that require no threshold and need ease of space partitioning
- Special parking bay designs for different spaces:
 - Parking bays parallel to track
 - Parking bays perpendicular to track
 - Multi integrated parking bays
- Ability to apply central wheeled panel systems without a parking bay
- Ability to apply with panel walls instead of glass
- Robust wheel systems that enable smooth and silent panel movement.
- Bottom and top panel brushes that minimise external factor penetration.
- Maximum security with hidden, in-between panels, to floor locking pins
- Wheel systems enhanced against corrosion and zamak alloy profile caps
- Easy mounting with adjustable hinge system
- Chic design of side frame profiles

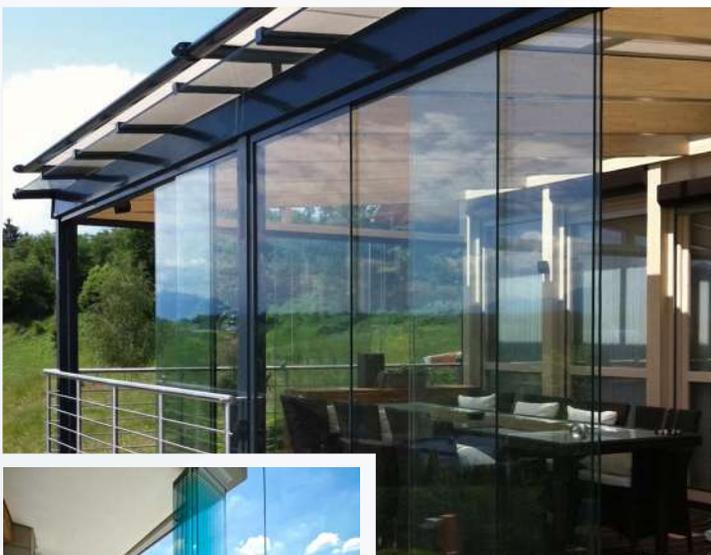

Glazing Lux System (Top Hang)

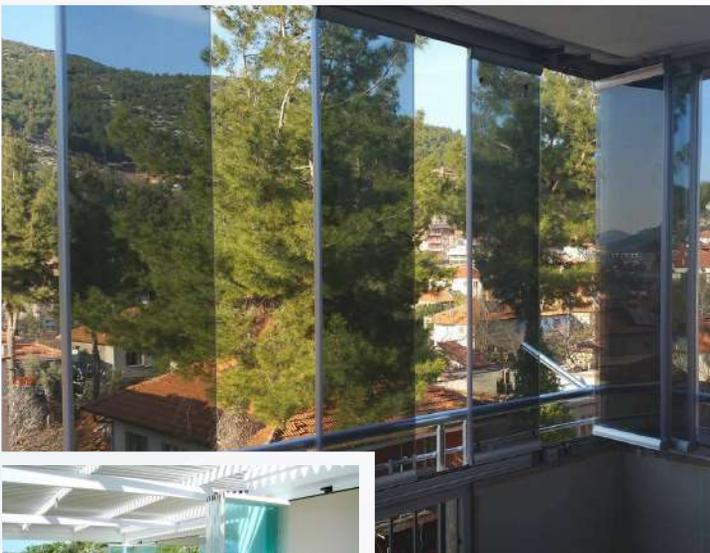

Benefits

Protects from harsh weather elements and external factors.

Enables creation of extra open/closed spaces, enlarges and partitions your living area.

Especially suitable for entrances/exits thanks to its no-threshold design.

Easy to clean thanks to folding panels. Reduces heating/cooling expenses of the building by increased insulation and extends building life cycle by reduced corrosion.

Features

- Max. system height 4000 mm

- Max. panel width 1200 mm

- Glass thickness 10 mm (tempered)

- Profile colours RAL or Anodised (profile caps gray or black in color)

- Especially for entrance/exits that need no- threshold.

(system accumulates on a parking bay)

- Load capacity of each rollers is 60 kg (2 rollers are used in one panel)