
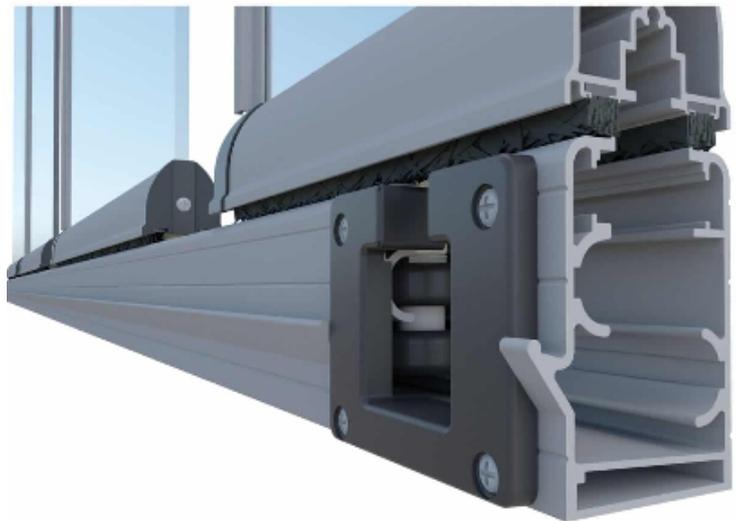
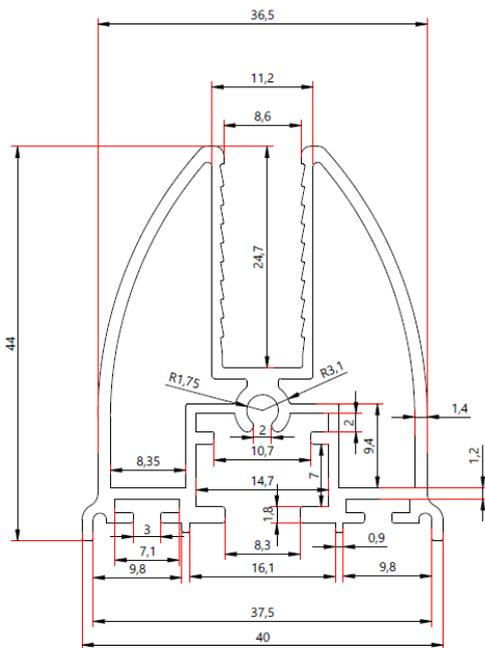


Standard Glazing Folding System

System Product Description

Frame Depth : 49,6mm
 Sash Depth Wall T : 36,5 mm
 Max Glass Thickness : 6mm - 10 mm

System Detail

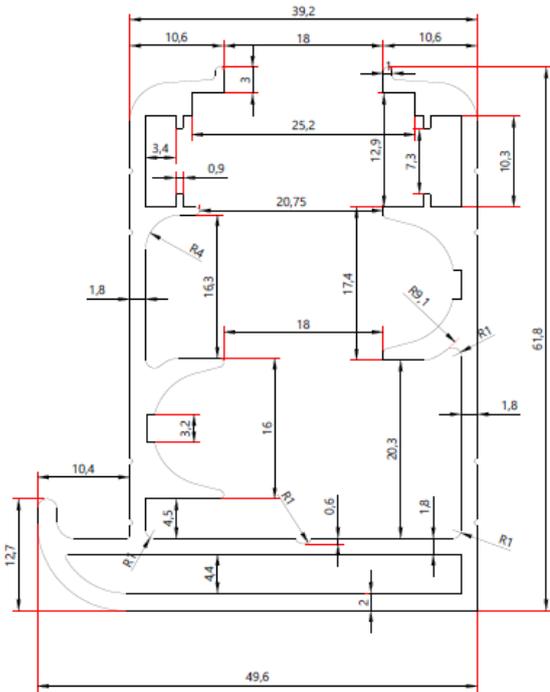

WATER CORRUGATED PROFILE

It discharges the water coming with rain or perspiration from the inside of the profile to the outside.



FITLING OPTION

Plastic roving or aluminum roving with special design bristle brush is applied between the glass.




2 YEAR SYSTEM WARRANTY

The system is guaranteed for 2 (two) years from the date of installation against all kinds of production, material and assembly defects.



CURTAINS CAN BE USED

Roller blinds or cornices can be attached to the curtain profile. If you wish, pleated curtains can also be installed on the windows.

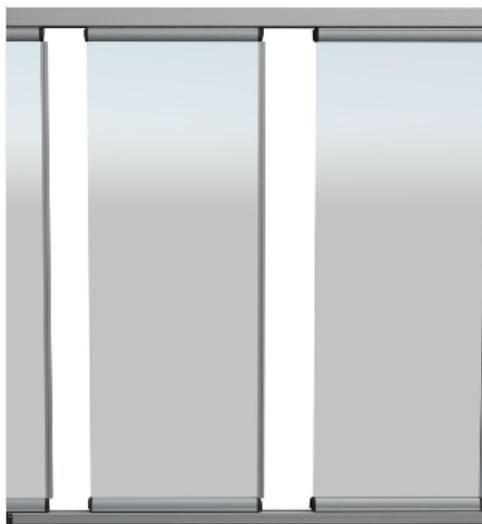

IMPACT RESISTANT GLASS

The glass used in the system is tempered and edge-ground glass.