

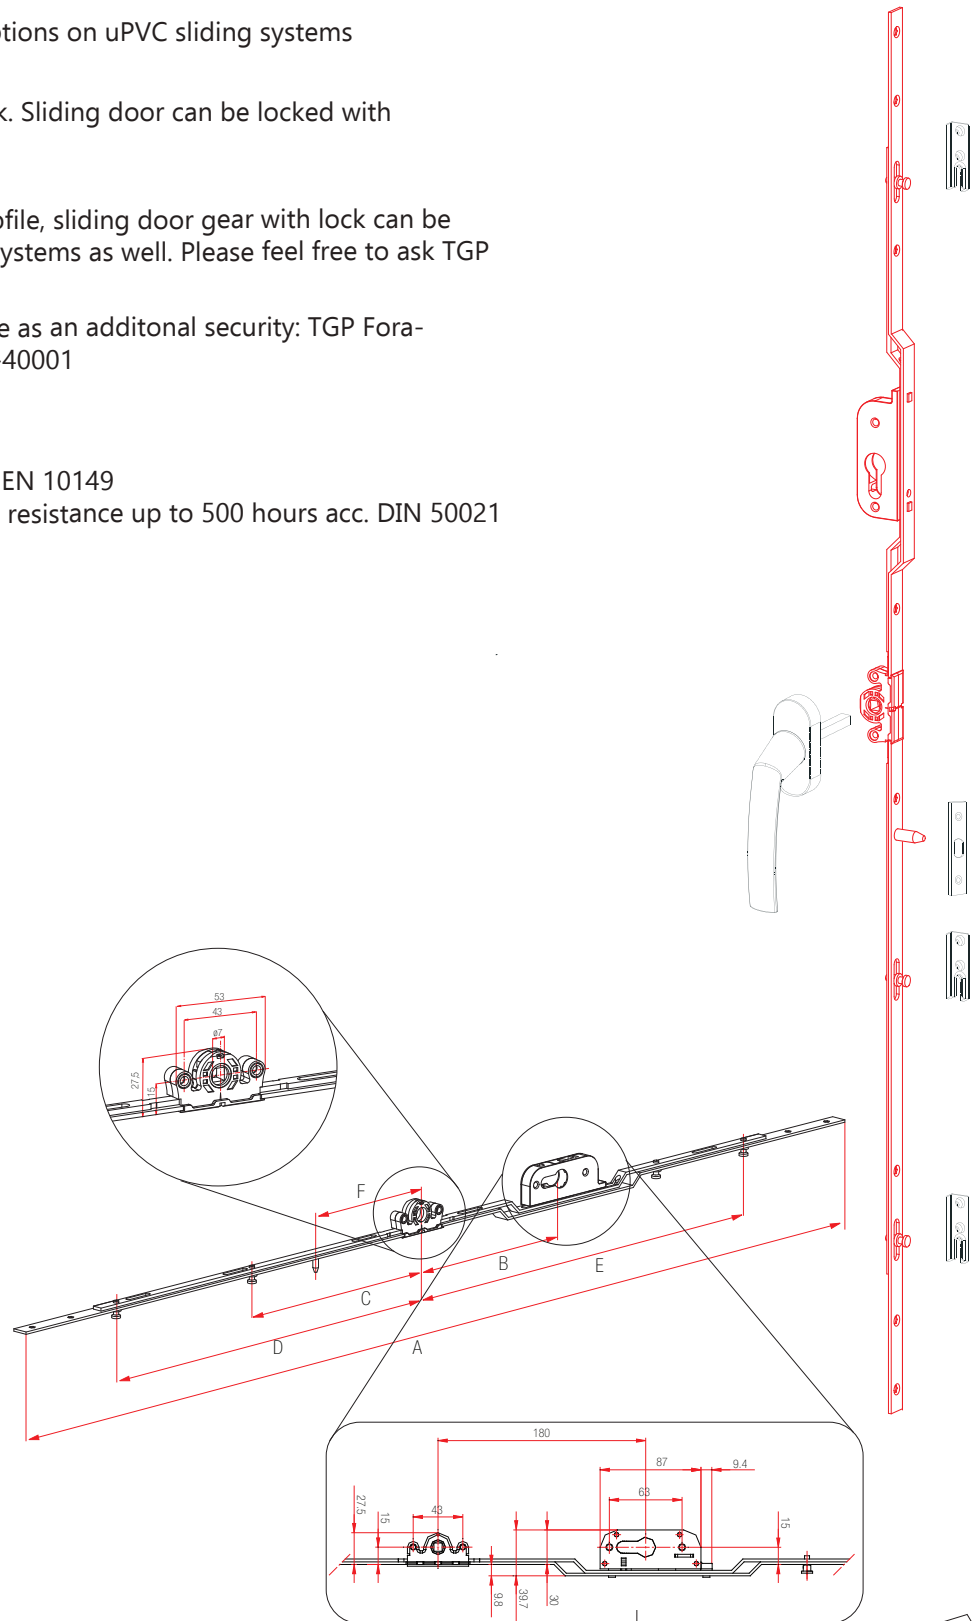
Description



- 3 point & 4 point locking options on uPVC sliding systems
- Thanks to the additional lock. Sliding door can be locked with cylinder.
- With a special aluminum profile, sliding door gear with lock can be used on aluminum profiles systems as well. Please feel free to ask TGP technical team.
- You may use lockable handle as an additional security: TGP Foralockable Window-Handle T-40001

Material Specification

Body : Steel acc. EN 10149
 Surface : Corrosion resistance up to 500 hours acc. DIN 50021

Technical Drawing



PG	Code	Dimension	A	B	C	D	E	F		
T2	T-22035-16-0-1	1600-1800	1600	-	-	675	675	106,5	3	10
T2	T-22035-18-0-1	1800-2000	1800	320	300	775	775	106,5	4	10
T2	T-22035-20-0-1	2000-2100	2000	320	300	875	875	131,5	4	10